




Serie PURE

High resolution LED display for indoor & outdoor

Introduction to the Transparent Screen Cabinet

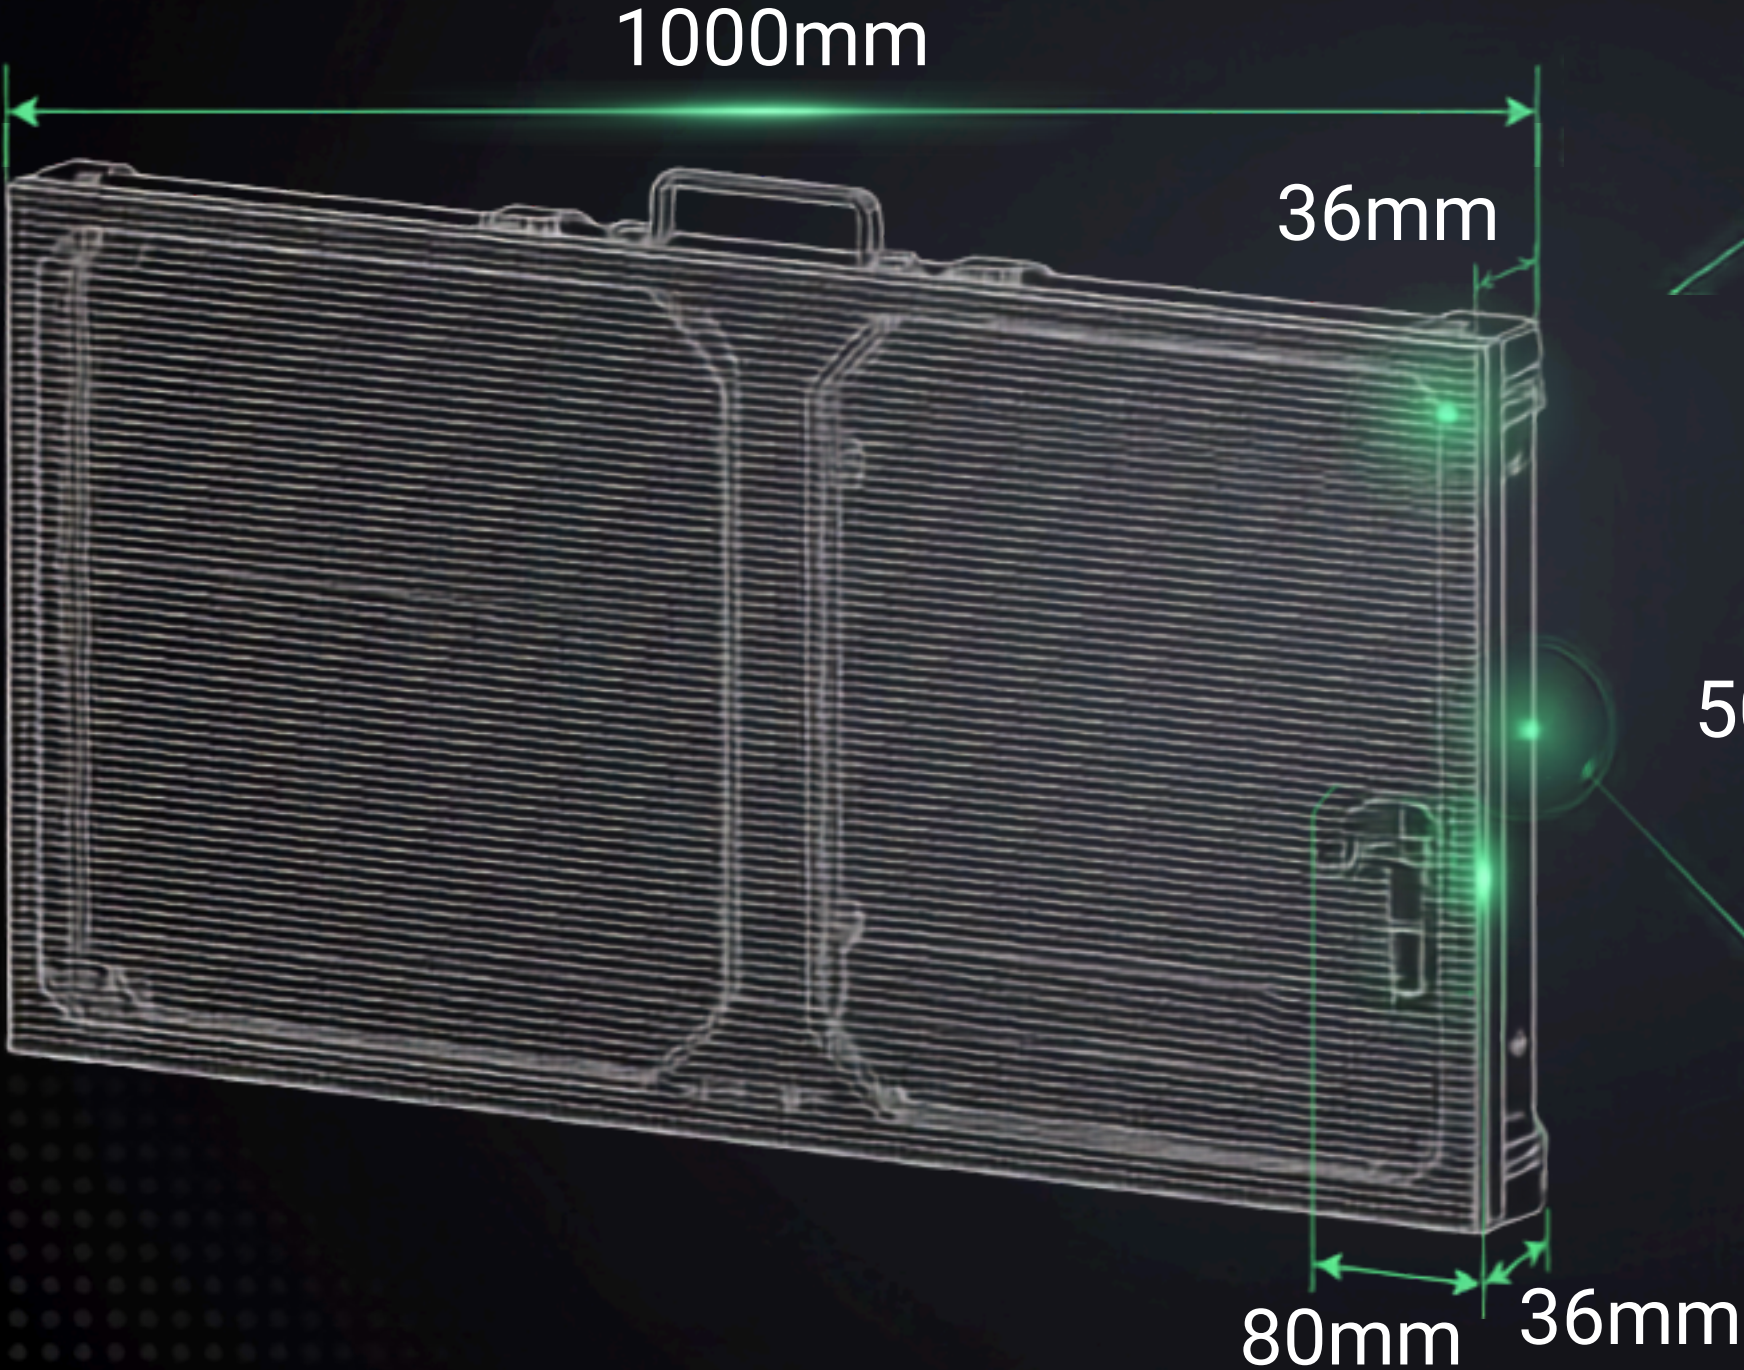

Curved Locking Mechanism



Structural Connections



Adjustable Angle Cabinet

Can be installed as a circular screen




Advantages: Adjustable angle, high precision, minimal assembly error. Greater load capacity, allowing assembly of a giant screen up to 30 meters tall.

Product Features



Lightweight



IP65



Transparency



Free
Assembly



All Weather



Wide viewing
angle

SPECIFICATIONS

Parameter	P3.9	P5.2	P10.4	P15.6
Pixel Pitch	H3.9: V7.8	H5.2: V10.4	H10.4: V10.4	H15.6: V15.6
LED Type	SMD1921	SMD1921	SMD2727	SMD2727
Transparency Rate	53%	58%	58%	80%
Resolution (dots/m²)	32768	18432	9216	4096
Module Size (mm)	500*125 / 500*250	500*250	500*250	500*250
Cabinet Size (mm)	1000*500mm	1000*500mm	1000*500mm	1000*500mm
Cabinet Resolution	256*64	192*48	96*48	64*32
Cabinet Weight (kg)	7.5	7.5	7.5	7.5
Refresh Rate (Hz)	3840	3840	3840	3840
Max. Power Consumption	800W/m²	800W/m²	800W/m²	800W/m²
Avg. Power Consumption	260W/m²	260W/m²	260W/m²	260W/m²
Ingress Protection Rating	IP43/IP65	IP65	IP65	IP65
Operating Environment	Indoor/Outdoor	Outdoor	Outdoor	Outdoor
Brightness	>4500	>4500	>4500	>5500
Lifespan (H)	>100000 hours	>100000 hours	>100000 hours	>100000 hours
Grayscale (bit)	14 bits	14 bits	14 bits	14 bits
Cabinet Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Input Voltage (V)	AC 100V-240V 50/60Hz	AC 100V-240V 50/60Hz	AC 100V-240V 50/60Hz	AC 100V-240V 50/60Hz
Maintenance	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Operating Temperature	-10°C - +40°C	-10°C - +40°C	-10°C - +40°C	-10°C - +40°C



iMagō LAND



imagoland.com
cs@imagoland.com
contact@imagoland.us